Delta™ Anchor

The Delta™ anchor is constructed of high-grade manganese steel and stainless steel for maximum tensile strength. Its unique shank profile and ballasted tip make it self-launching. And its low center of gravity and self-righting geometry ensure that it will set immediately.

Consistent and reliable in performance, the Delta™ anchor is guaranteed for life against breakage†, has Lloyd's Approval* as a High Holding Power anchor and is specified as the primary anchor used by numerous National Lifeboat organizations.

Galvanized Delta™ Anchor

Stainless Steel Delta™ Anchor

Lloyd's Register TYPE APPROVAL

Dimension Diagram

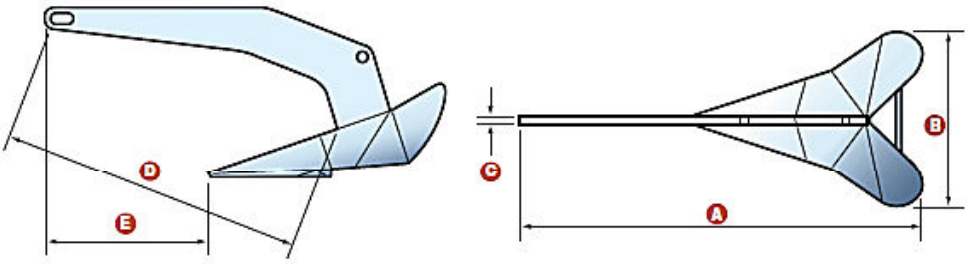

Delta™ Anchor Specifications

Galvanized Part No	Stainless Part No	Anchor Weight kg	Anchor Weight lb	Recommended Chain Size mm	Recommended Chain Size in	A mm	A in	B mm	B in	C mm	C in	D mm	D in	E mm	E in
0057404		4	9	6–7	¼	514	20 ¼	230	9	8	5/16	387	15 ¼	210	8 ¼
0057406	0057306	6	14	6–7	¼	593	23 3/8	265	10 3/8	10	3/8	450	17 5/8	243	9 ½
0057410	0057310	10	22	8	5/16	695	27 3/8	310	12 ¼	13	½	526	20 5/8	282	11 1/8
0057416	0057316	16	35	8	5/16	812	32	362	14 ¼	13	½	614	24 1/8	328	13
0057420	0057320	20	44	10	3/8	877	34 ½	392	15 3/8	16	5/8	663	26 1/8	357	14
0057425	0057325	25	55	10	3/8	945	37 ¼	415	16 3/8	16	5/8	713	28	387	15 ¼
0057432	0057332	32	70	10	3/8	1023	40 ¼	453.5	17 4/5	20	3/4	775	30 ½	425	16 3/4
0057440	0057340	40	88	10	3/8	1103	43 ½	489	19 ¼	20	3/4	883	32 3/4	437	17 ¼
0057450	0057350	50	110	12	½	1175	46 ¼	523	20 ½	20	3/4	890	35	479	18 7/8
0057463	0057363	63	140	12	½	1270	50	567	20 3/8	22	7/8	963	38	508	20

Delta™ Anchor Selection Guide

	Anchor Weight kg	Anchor Weight lb	Chain Size mm	Chain Size in	Boat Length Overall: 6 m 20 ft	9.2m 30 ft	12.2m 40 ft	15.2 m 50 ft	18.3 m 60 ft	21.3 m 70 ft	24.4 m 80ft	27.4 m 90ft
Delta™	4	9	6-7	¼								
Delta™	6	14	6-7	¼								
Delta™	10	22	8	5/16								
Delta™	16	35	8	5/16								
Delta™	20	44	10	3/8								
Delta™	25	55	10	3/8								
Delta™	32	70	10	3/8								
Delta™	40	88	10	3/8								
Delta™	50	110	12	½								
Delta™	63	140	12	½								

†Damage by deformation or bending is not covered by this guarantee.
*Lloyd's Test Certification is available for individual Delta™ anchors by arrangement.