


Bullet

Low-friction Bullet blocks lead control lines aft. They are compact and lightweight, with fast trim and release under high or low loads. A range of styles lets these blocks adapt to almost all control line applications.

Free-rolling Delrin® ball bearings, sheave and sideplates UV-stabilized with carbon-black additive for maximum protection.

Wire Bullet blocks use roller bearings to carry higher loads and feature Hardkote-anodized Teflon® impregnated aluminum sheaves for strength and corrosion resistance. Mast exit blocks with cams used for halyard controls and under boom mainsheets.

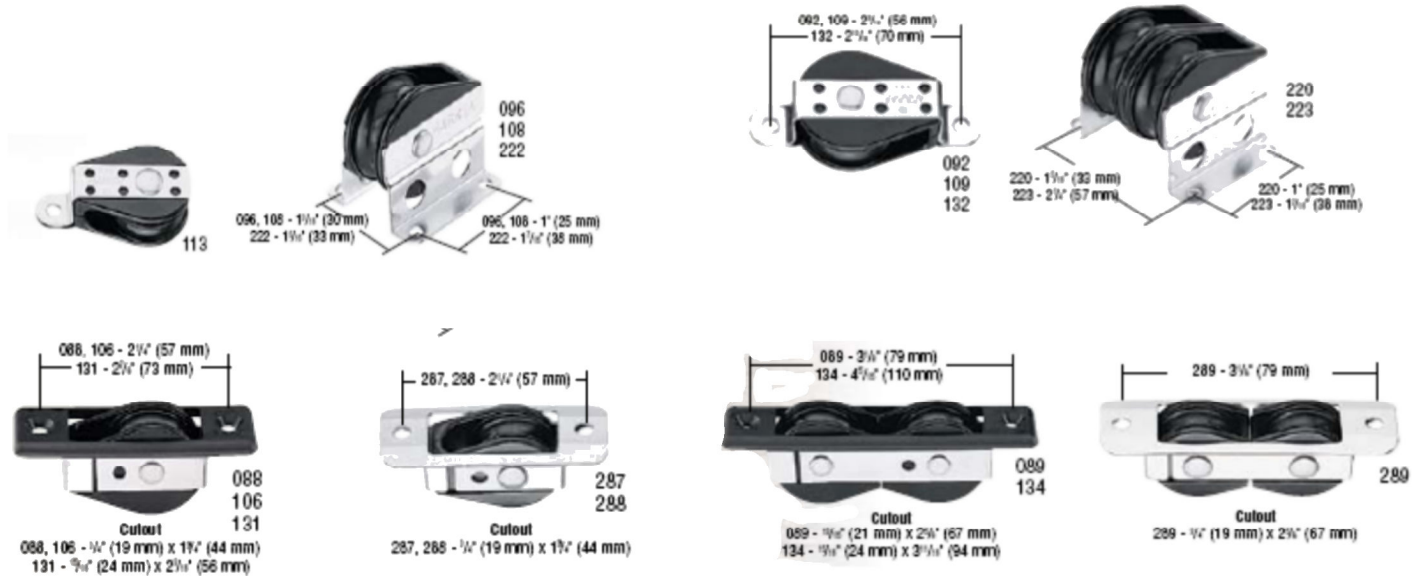

| Part No. | Description | Sheave Ø | | Length | | Weight | | Max line Ø | | Shackle pin Ø | | Safe working load | | Breaking strength | |
|---------------|------------------|----------|----|--------|----|--------|----|------------|----|---------------|----|-------------------|-----|-------------------|-----|
| | | in | mm | in | mm | oz | g | in | mm | in | mm | lb | kg | lb | kg |
| Bullet | | | | | | | | | | | | | | | |
| 088 | Thru-deck* | 1 1/4 | 29 | 3 | 76 | 1.25 | 35 | 3/16 | 8 | — | — | 300 | 136 | 2000 | 907 |
| 089 | In-line exit* | 1 1/4 | 29 | 3 3/4 | 95 | 1.75 | 50 | 3/16 | 8 | — | — | 400 | 181 | 2000 | 907 |
| 092 | Cheek** | 1 1/4 | 29 | 2 3/4 | 73 | 1.25 | 35 | 3/16 | 8 | — | — | 300 | 136 | 2000 | 907 |
| 096 | Upright** | 1 1/4 | 29 | 1 1/2 | 38 | 1.5 | 43 | 3/16 | 8 | — | — | 300 | 136 | 2000 | 907 |
| 106 | Wire thru-deck* | 1 1/4 | 29 | 3 | 76 | 1.25 | 35 | 3/16 | 8 | — | — | 500 | 227 | 2000 | 907 |
| 108 | Wire upright** | 1 1/4 | 29 | 1 1/2 | 38 | 1.5 | 43 | 3/16 | 8 | — | — | 500 | 227 | 2000 | 907 |
| 109 | Wire cheek** | 1 1/4 | 29 | 2 3/4 | 73 | 1.25 | 35 | 3/16 | 8 | — | — | 500 | 227 | 2000 | 907 |
| 113 | Pivoting cheek** | 1 1/4 | 29 | 1 1/4 | 29 | 1 | 28 | 3/16 | 8 | — | — | 300 | 136 | 2000 | 907 |
| 220 | Double upright** | 1 1/4 | 29 | 1 1/2 | 38 | 2.25 | 64 | 3/16 | 8 | — | — | 400 | 181 | 2000 | 907 |
| 287 | Thru-deck** | 1 1/4 | 29 | 3 | 76 | 1.25 | 35 | 3/16 | 8 | — | — | 300 | 136 | 2000 | 907 |
| 288 | Wire thru-deck** | 1 1/4 | 29 | 3 | 76 | 1.5 | 43 | 3/16 | 8 | — | — | 400 | 181 | 2000 | 907 |
| 289 | In-line exit** | 1 1/4 | 29 | 3 3/4 | 95 | 2 | 60 | 3/16 | 8 | — | — | 400 | 181 | 2000 | 907 |