

HARKEN®


Micro CB Track & Accessories

NEW: 2707.2.5m, 2709.1.2m

Micro track comes in low and high-beam configurations. The wide track base adds stability and protects cored decks. A channel on the track bottom makes it easy to install on unfair decks and eliminates rocking on curved surfaces like booms or masts. Fastener holes fit both metric and imperial screws.

16 mm control blocks spin on stainless steel balls that roll freely under high loads. The step-down design keeps the controls low and clear of the mainsheet block.

Super-tough plastic endstops absorb sudden shock loads that can occur during unintentional jibes.

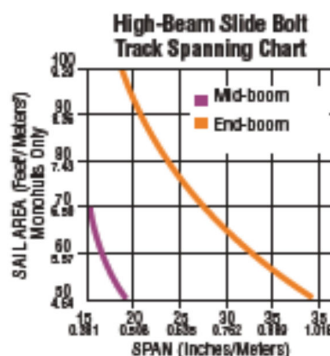

High-strength 16 mm ball bearing control blocks provide 2:1 purchase

Track is Hardkote-anodized for strength and durability

Low-profile, line-shedding endstop with built-in groove deadends 2:1 control line



Sally Barkow and Crew, Olympic Yachting — Nico Martinez Photo



2704




2705




2706



2710



2707



2709

Track Bending		
Minimum Radius		
Track	in	m
2707	42	1.07
2709	60	1.52



2707



2709

Accessories

Part No.	Description	Length		Weight each		Height above track		Max line Ø		Safe working load		Breaking strength		Purchase
		in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg	
2704	Control block (pair)	1 1/2	33	.39	11	3/4	19	7/16	5	250	113	750	339	2:1
2705	Control tang (pair)	1 1/2	21	.11	3	1 1/16	17	—	—	250	113	750	339	1:1
2706	Micro endstop (pair)	1 1/2	27	.11	3	1/2	3	—	—	250	113	750	339	—
2710	High-beam endstop (pair)	1 1/2	27	.32	9	1/2	3	—	—	250	113	750	339	—

Track

Part No.	Description	Length		Hole spacing		Weight		Fasteners (FH)	Splice link
		ft	m	in	mm	oz	g		
2707.600mm	Low-beam*	1.97	.6	1 3/16	50	4.6	129	#8	2711
2707.1m	Low-beam*	3.28	1	1 3/16	50	7.6	214	#8	2711
2707.1.2m	Low-beam*	3.93	1.2	1 3/16	50	9	257	#8	2711
2707.2m	Low-beam*	6.56	2	1 3/16	50	15.1	429	#8	2711
2707.2.5m	Low-beam*	8.20	2.5	1 3/16	50	18.9	538	#8	2711
2709.1m	High-beam**	3.28	1	3 15/16	100	13.2	375	#8	—
2709.1.2m	High-beam**	3.93	1.2	3 15/16	100	15.8	449	#8	—
2709.2m	High-beam**	6.56	2	3 15/16	100	28.4	749	#8	—

*1st hole 1" (25 mm) **1st hole 1 15/16" (50 mm)

Micro CB Cars

Micro Captive Ball Traveler Cars are used on small dinghies and catamarans. The one-piece solid aluminum construction is lightweight and strong. Machined aluminum Hardkote-anodized races permit Teflon® balls to transition smoothly from the active-to-return race for smooth trimming or easing. Stainless steel wire guides keep the balls captive when the car is off the track. Pivoting shackle cars have low pivot points to handle non-vertical loads.

2703 Ti-Lite cars matched with Ti-Lite blocks provide the ultimate, lightweight, low-profile system. High-tech line replaces shackles and spring. Control lines attach with a loop splice or clove hitch. Consult Use Chart on page 117 to size traveler to mainsail area.

Use for:

Mainsheet cars
Jib sheet cars
Vangs on small dinghies
Controls on small keelboats

HARKEN®



Part No.	Description	Length		Width		Car body height		Weight		Safe working load		Breaking strength	
		in	mm	in	mm	in	mm	oz	g	lb	kg	lb	kg
2700	Car/pivoting shackle	2 1/4	56	1 1/4	40	1/4	19	1.76	50	310	140	1500	680
2701	Car/pivoting shackle/control blocks	3 1/4	87	1 1/4	40	1/4	19	2.58	73	310	140	1500	680
2702	Car/pivoting shackle/bangs	2 1/4	61	1 1/4	40	1/4	19	2.08	59	310	140	1500	680
2703	Ti-Lite car	2 1/4	56	1 1/4	40	1/4	19	1.8	45	310	140	1500	680

See page 43 for replacement balls