

Line/Wire High Strength

Lightweight, low-friction wire blocks carry wire halyards and high-strength control lines on boats of all sizes.

High-load composite bearings carry axial loads. Hardkote-anodized Teflon® impregnated sheave for strength and corrosion resistance.

1.00 in wire blocks use low-friction thrust washers. 1.50 in and 2.00 in wire blocks feature sload balls between the sheave and the sideplate to minimize friction from unfair leads.


Fared stainless steel sideplates prevent line chafe and friction when leads are unfair

High load composite bearings handle wire and high-strength line

Sideplates rotate to insert pre-swaged/Nico pressed wire fittings



300
304
308

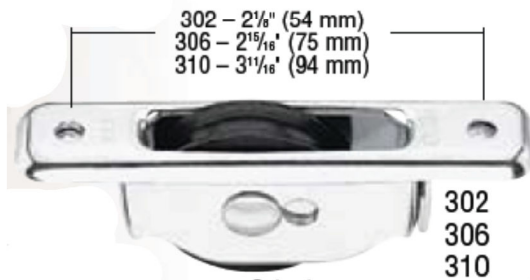

302 - 2¹/₈" (54 mm)
306 - 2¹/₈" (75 mm)
310 - 3¹/₈" (94 mm)

302
306
310

Cutout

302 1³/₃₂" (11 mm) x 1¹⁷/₃₂" (39 mm)
306 1¹/₃₂" (13 mm) x 2⁹/₁₆" (59 mm)
310 9¹/₁₆" (14 mm) x 2²⁹/₃₂" (73 mm)



321
322



301 - 7¹/₈" (22 mm)
305 - 1¹/₄" (32 mm)
309 - 1⁵/₈" (41 mm)

301
305
309



312
313
314



320

Part No.	Description	Sheave Ø		Weight		Max wire Ø		Max line Ø		Shackle pin Ø		Safe working load		Breaking strength	
		in	mm	oz	g	in	mm	in	mm	in	mm	lb	kg	lb	kg
300	Single	1	25	1	28	3/32	2	5/32	4	3/16	5	1000	454	2000	907
301	Cheek†*	1	25	1.25	35	3/32	2	5/32	4	—	—	1000	454	2000	907
302	Thru-deck*	1	25	1	28	3/32	2	5/32	4	—	—	1000	454	2000	907
304	Single	1 1/2	38	2.75	78	1/8	3	3/16	5	1/4	6	1500	680	3000	1361
305	Cheek†**	1 1/2	38	3.25	92	1/8	3	3/16	5	—	—	1500	680	3000	1361
306	Thru-deck*	1 1/2	38	3.25	92	1/8	3	3/16	5	—	—	1500	680	3000	1361
308	Single	2	51	5.25	149	3/16	5	1/4	6	5/16	8	2000	907	4000	1814
309	Cheek†***	2	51	6	170	3/16	5	1/4	6	—	—	2000	907	4000	1814
310	Thru-deck**	2	51	5.75	163	3/16	5	1/4	6	—	—	2000	907	4000	1814
312	Single/becket	1	25	1.25	35	3/32	2	5/32	4	3/16	5	1000	454	2000	907
313	Single/becket	1 1/2	38	3	85	1/8	3	3/16	5	1/4	6	1500	680	3000	1361
314	Single/becket	2	51	5.75	163	3/16	5	1/4	6	5/16	8	2000	907	4000	1814
320	Ferrule head	1 1/2	38	3	85	1/8	3	3/16	5	—	—	1500	680	3000	1361
321	Small split backstay plate for 304	—	—	1	28	—	—	—	—	—	—	—	—	—	—
322	Split backstay plate for 308	—	—	1.19	34	—	—	—	—	—	—	—	—	—	—

†Fasteners included **#10 (5 mm) RH fasteners ***1/4" (6 mm) RH fasteners ****5/16" (8 mm) RH fasteners