



**FEATURES**

- ▶ Precision moulded Acetal sheaves running on stainless steel ball bearings provide high performance & low friction.
- ▶ High load versions feature a Nylatron® sheave suitable for rope and wire.
- ▶ High static and dynamic load capacity.
- ▶ Light weight.
- ▶ Versatile head fittings.
- ▶ Single blocks are available with swivel head or 2 way loop top.
- ▶ Double & triple blocks are supplied with shackle and have a 2 way head that can be fixed at 0 or 90 degrees.
- ▶ Double & triple blocks allow the creation of powerful purchase systems.
- ▶ Exit blocks minimise friction in lines passing through the deck or exiting masts and booms. Supplied with cover plate or low profile version with side tabs only.
- ▶ Upright lead blocks are available in low profile fixed or pivoting options.
- ▶ Linked blocks are used for dinghy barber haulers, cunninghams and spinnaker pole launching systems.



▶ RF498 - Saddle




▶ RF318 - Stand-up Spring



▶ RF1850S  
3mm (1/8") pin,  
suits loop top single blocks

PRODUCT No.	DESCRIPTION	SHEAVE DIAM. mm (in.)	MAX. ROPE mm (in.)	MAX. WIRE mm (in.)	PIN DIAM. mm (in.)	M.W.L. kg (lb)	B.L. kg (lb)	WEIGHT g (oz)
<b>BB Ball Bearing</b>								
RF20100	Single block, swivel shackle head	20 (3/4)	6 (1/4)	-	3 (1/8)	250 (550)	550 (1210)	20 (0.7)
RF20101	Single block, loop head	20 (3/4)	6 (1/4)	-	-	250 (550)	550 (1210)	18 (0.6)
RF20111	Single block, becket, loop head	20 (3/4)	6 (1/4)	-	-	250 (550)	550 (1210)	18 (0.6)
RF20141	Stand-up block	20 (3/4)	6 (1/4)	-	-	250 (550)	550 (1210)	20 (0.7)
RF20202	Double block, 2-axis shackle head	20 (3/4)	6 (1/4)	-	4 (5/32)	350 (770)	700 (1540)	42 (1.5)
RF20212	Double block, becket, 2-axis shackle head	20 (3/4)	6 (1/4)	-	4 (5/32)	350 (770)	700 (1540)	44 (1.6)
RF20281	Double block, in-line	20 (3/4)	6 (1/4)	-	-	250 (550)	550 (1210)	28 (1.0)
RF20284	Linked blocks, S20 & S20	20 (3/4)	6 (1/4)	-	-	250 (550)	550 (1210)	30 (1.1)
RF20302	Triple block, 2-axis shackle head	20 (3/4)	6 (1/4)	-	4 (5/32)	400 (880)	850 (1870)	62 (2.2)
RF20312	Triple block, becket, 2-axis shackle head	20 (3/4)	6 (1/4)	-	4 (5/32)	400 (880)	850 (1870)	64 (2.3)
RF20332	Triple block, becket, cam cleat, 2-axis shackle head	20 (3/4)	6 (1/4)	-	4 (5/32)	400 (880)	850 (1870)	122 (4.3)
<b>HL High Load</b>								
RF20101HL	Single block, loop head	20 (3/4)	6 (1/4)	3 (1/8)	-	275 (610)	550 (1210)	14 (0.5)

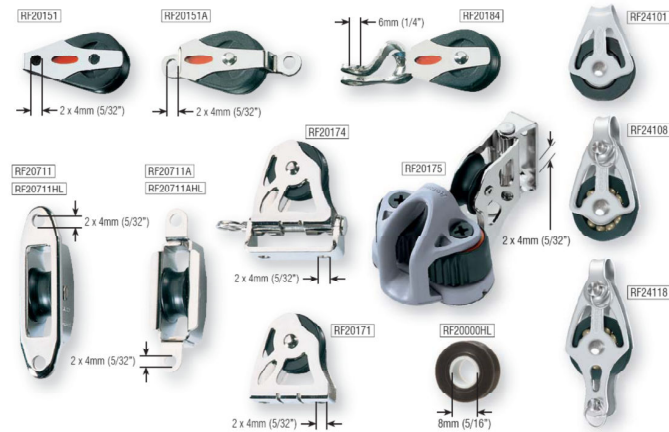

**FEATURES**

- ▶ Blocks with clevis pin heads have an alloy sheave with oversize Torlon® ball bearings for minimum friction.
- ▶ Cheek block RF20151 has through-hub mounting for maximum strength.
- ▶ Cheek block RF20151A suits pop rivet mounting.

**APPLICATIONS**

- ▶ Dinghy control lines.
- ▶ Dinghy vang.
- ▶ Cunninghams.
- ▶ Traveller controls.

**MATERIALS**

- ▶ U.V. stabilised Acetal sheaves.
- ▶ Stainless steel ball bearings.

- ▶ Alloy sheave versions use Torlon® ball bearings.
- ▶ High load sheave uses self lubricating Nylatron®.
- ▶ Impact modified, fibre reinforced and U.V. stabilised Zytel cheeks.
- ▶ Grade 316 stainless steel loop strap and head fittings.



▶ RF613S  
3mm (1/8") pin,  
suits RF20100



▶ RF615  
4mm (5/32") pin,  
suits double & triple blocks



▶ RF801  
4mm (5/32") pin,  
suits RF24106, RF24118

PRODUCT No.	DESCRIPTION	SHEAVE DIAM. mm (in.)	MAX. ROPE mm (in.)	MAX. WIRE mm (in.)	PIN DIAM. mm (in.)	M.W.L. kg (lb)	B.L. kg (lb)	WEIGHT g (oz)
<b>BB Ball Bearing</b>								
RF20151	Cheek block	20 (3/4)	6 (1/4)	-	-	230 (500)	230 (500)	14 (0.5)
RF20151A	Cheek block rivet mount	20 (3/4)	6 (1/4)	-	-	200 (440)	550 (1210)	17 (0.6)
RF20171	Upright lead block	20 (3/4)	6 (1/4)	-	-	250 (550)	550 (1210)	18 (0.6)
RF20174	Pivoting lead block	20 (3/4)	6 (1/4)	-	-	250 (550)	550 (1210)	30 (1.1)
RF20175	Pivoting lead block, cleat	20 (3/4)	6 (1/4)	-	-	150 (330)	300 (660)	78 (2.7)
RF20184	Single block, loop mount	20 (3/4)	6 (1/4)	-	-	250 (550)	550 (1210)	22 (0.8)
RF20711	Exit block, cover plate	20 (3/4)	6 (1/4)	-	-	250 (550)	1000 (2200)	22 (0.8)
RF20711A	Exit block, side tabs	20 (3/4)	6 (1/4)	-	-	250 (550)	1000 (2200)	22 (0.8)
RF24101	Single block, loop head, Acetal sheave, Acetal balls	20 (3/4)	5 (3/16)	-	-	85 (190)	480 (1060)	7 (0.2)
RF24108	Single block, clevis pin head, alloy sheave, Torlon® balls	20 (3/4)	4 (5/32)	-	4 (5/32)	90 (200)	360 (790)	10 (0.4)
RF24118	Single block, becket, clevis pin head, alloy sheave, Torlon® balls	20 (3/4)	4 (5/32)	-	4 (5/32)	135 (300)	360 (790)	13 (0.5)
<b>HL High Load</b>								
RF20000HL	Sheave, HL, Nylatron®	20 (3/4)	6 (1/4)	3 (1/8)	-	-	-	2 (0.1)
RF20711HL	Exit block, cover plate	20 (3/4)	6 (1/4)	3 (1/8)	-	275 (610)	1000 (2200)	22 (0.8)
RF20711AHL	Exit block, side tabs	20 (3/4)	6 (1/4)	3 (1/8)	-	275 (610)	1000 (2200)	22 (0.8)